






技术参数:

- 1) 口径: 1/2 "-36"
- 2) 公称压力: 150LB, 300LB, 600LB
- 3) 阀体材料: ASTM A216 WCB / CF8 / CF8M
- 4) 阀盖材料: ASTM A216 WCB / CF8 / CF8M
- 5) Bonnet: ASTM A216 WCB / CF8 / CF8M
- 6) 阀杆: 316L, D507Mo, D577
- 7) Stem: 1Cr13, F6a
- 8) Yoke nut: ZCuAL10Fe3, ASTM A439 D-2
- 9) 阀瓣: 316L, 304, 304L, 316, 316L, 304, 304L, WCB
- 10) 密封材料: GB, ANSI API, 316L, 304, 304L, 316, 316L, 304, 304L
- 11) 阀型: Rising Stem Gate Valve
- 12) 阀座密封材料: 316L, 304, 304L, 316, 316L, 304, 304L
- 13) 阀座密封材料: 316L, 304, 304L, 316, 316L, 304, 304L
- 14) 公称压力: 2.94MPa / 7.67MPa / 15.3MPa
- 15) 公称压力: 2.16MPa / 5.62MPa / 11.23MPa
- 16) 公称压力: 0.6MPa
- 17) 阀体材料: 316L, 304, 304L, 316, 316L, 304, 304L



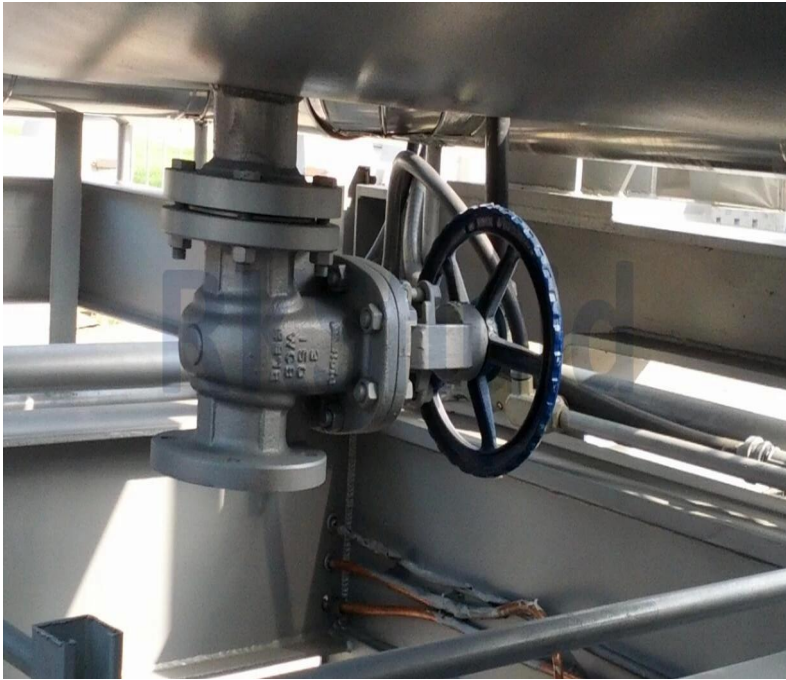

OUR COOPERATED CLIENTS

RKSfluid FLOW CONTROL COMPANY



Our Certificates



Exhibition Photos

