





RKSfluid®

A key Valve in Flow Control

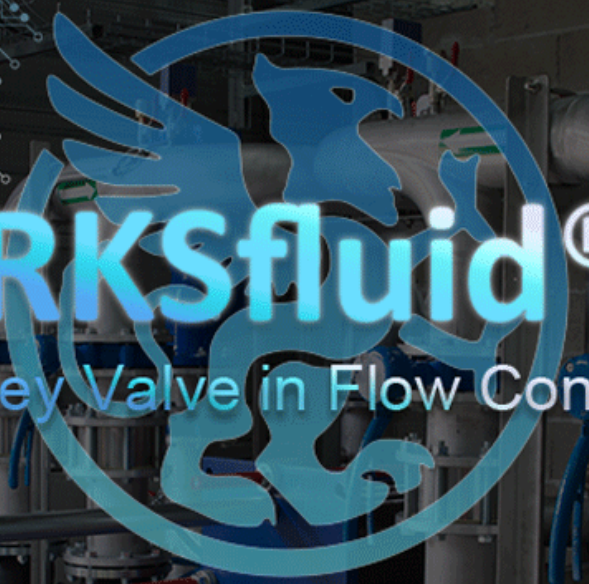

DESIGN FEATURES

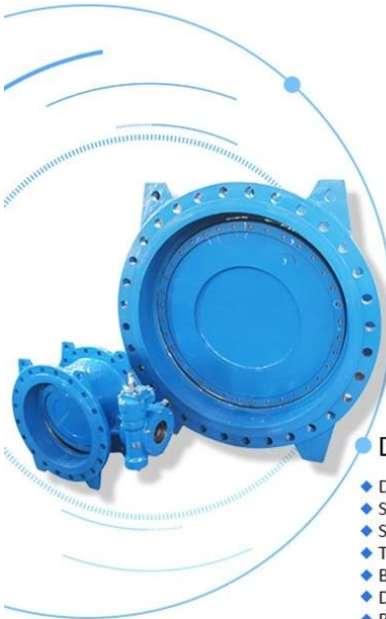

SPECIFICATION	
Nominal pressure (MPa)	1.6
Testing pressure(MPa)	Seal 2.4
	Shell 1.76
Working pressure (MPa)	1.6
Suitable temperature (°c)	<80°c
Suitable medium	Water


TECHNICAL REQUIREMENT

- 1.Face to face standard: EN 558 Series 14.
- 2.Flanges standard: BS EN1092-2:1997 PN16.
- 3.Tests standard: BS EN12266-1:2003 Part 1 Rate A.

DESCRIPTION :

- ◆ Double Flange Eccentric Resilient Seated Butterfly Valve
- ◆ Size Range DN100-DN3000
- ◆ Standard - ISO / BS / DIN / AWWA / API
- ◆ Tests Standard - BS EN 12266-1
- ◆ Body - Ductile Iron / Cast Iron / Stainless Steel / WCB
- ◆ Disc - Ductile Iron / Cast Iron / Stainless Steel / WCB
- ◆ Body Ring -SS420 / SS304 / SS316
- ◆ Retaining Ring - SS420 / SS304 / SS316
- ◆ Disc Ring -EPDM
- ◆ Shaft - SS420 / SS431 / SS316
- ◆ Fusion Bonded Epoxy Coating - Min 300 Microns

The designs, material and specifications shown are subject to change without notice due to our continuing programme of product development.

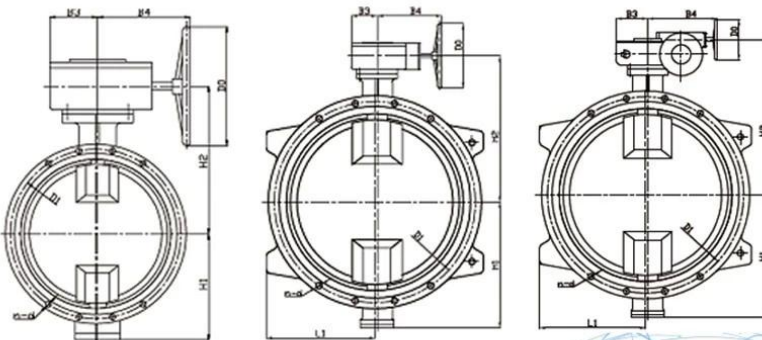

DN100-DN600

DN700-DN800

DN900-DN3000

APPLICATION SCENARIO



Our Factory



1997 年，RKS 公司成立，专业从事各种工业阀门、管件、法兰、泵、压缩机、换热器、压力容器、管道、储罐、塔器、反应釜、干燥机、过滤器、分离器等设备的制造、安装、维修、保养、改造、升级、拆除、回收等业务。

Exhibition Photos

