



RKSfluid®

A key Valve in Flow Control



Butterfly Valve



Ball Valve



Gate Valve



Globe Valve



Check Valve



Pipe Fittings

Product Description



Super Anti-corrosion
Epoxy powder coating **200-250µm**,
baking varnish over **200°C**,
use  material.



Free wedge nut, **reduces the stem bending forces** and at the same time enables it to be easily replaced.



The more compact new cap, reduces the water retention areas in order to **reduce the risk of bacterial growth**.



One piece stainless steel stem in for **better resistance to axial load and to with stand higher operating torques**.



Three locking tab for bayonet system prevents self-dismantling.



Dust guard integrating three O-ring shape, **prohibiting the introduction of foreign bodies** at the stem.



Male guiding system with composite sliding skate reduces the wear of the wedge against the body, allowing a smooth functionality and a longer life time of the valve.



Triple seal at the operating stem to ensure tightness with the test of time (2500 cycles).



New male composite sliding skate technology ensuring a low operating torque even under high differential pressure and preventing damage or corrosion generated by the friction.

Engineering Projects



Product Category





I 工厂生产的产品符合 ISO 9001 标准

II 工厂拥有 CNC 加工中心，能够生产高精度的零件

III 工厂拥有完善的质量管理体系

IV 工厂拥有完善的安全管理体系

V 工厂的产品符合 GB 标准，并通过了 TUV CE、ISO 9001、ADWO-2000、TS、PED、WRC WRAS、KTW、API 6D、API 609 等认证

VI 工厂拥有完善的环境管理体系，符合 ISO 14001 标准


Four factories



Why choose us



- 2 professional testing centers
- 28 senior professional researchers
- Independent research and development team

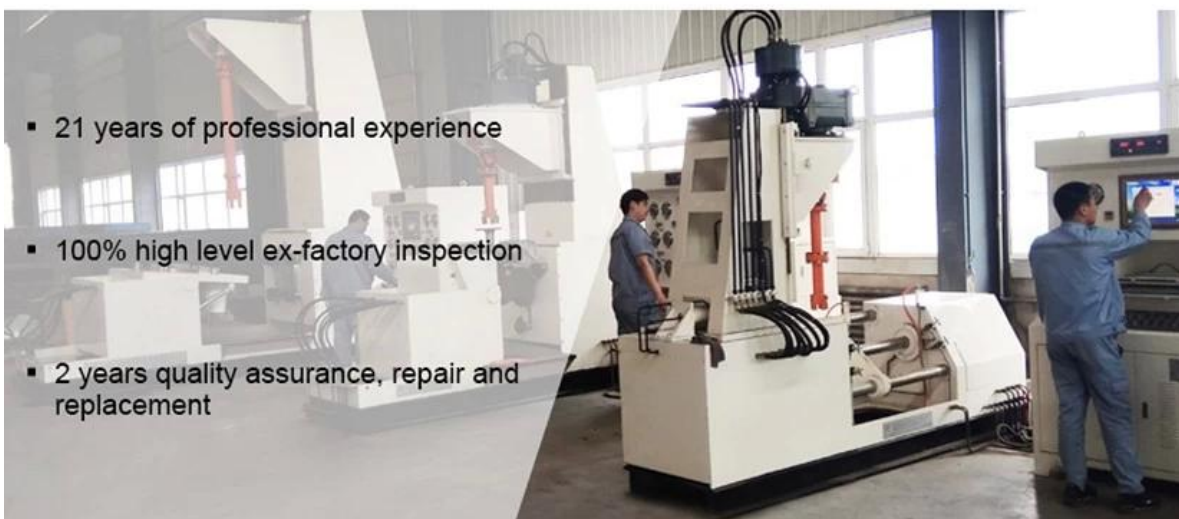

- 21 years of professional experience
- 100% high level ex-factory inspection
- 2 years quality assurance, repair and replacement

A RKSfluid

Q

A RKSfluid 4

Q

A 2 5

Q MOQ

A 1

Q

A 100 2

TUV API WRAS ISO

DIN ASME BS EN JIS API AWWA

Q

A RKSfluid 20 70